


NORFAB ALUMINIZED FABRICS

A Norfab woven rip stop special fiber blend light weight fabric containing anti-stat staple fibers. Applications include safety clothing, crash rescue garments, fire entry protection. This fabric is also designed for anti-static applications.

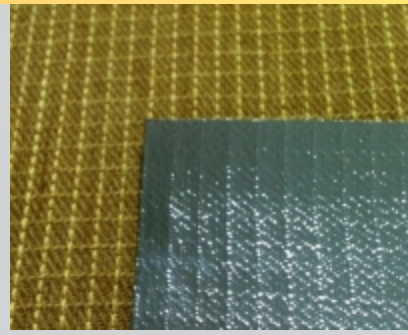

About NOR*FAB Corporation

NOR*FAB manufactures textile products using flame resistant synthetic fibers suited for use at high temperatures and for personal protection. These items include broad woven roll goods and narrow products in the form of woven and knitted tapes, sleeving, rope, and gasketing. NOR*FAB uses para-aramid, meta-aramid, melamine, phenolic, oxidized PAN, flame resistant rayon, polybenzimidazole, and other technical fibers blended into unique yarns which provide high levels of heat protection and insulation.

NOR*FAB produces many of these yarns on the DREF Spinning System for use in the weaving, knitting, gasket, and wire & cable industries. NOR*FAB possesses the largest collection of DREF III spinning frames of any yarn manufacturer in the world.

Among its offerings, NOR*FAB boasts fabric lines for the following end uses:

Firefighting

OMNI Vantage™, OMNI Elite®, OMNI 45™, and OMNI Quilt™

Electric Arc Protection

NF Arc™, ArcWeld®

Welding Protection


ArcWeld®

Cut Protection

CutPro®

Since 1979

Proud American Manufacturers of Flame Resistant Textiles



NORFAB Data Sheet

Style	05TT229- -AL1
Base Fabric	PBI®, Kevlar®, Anti-Stat Fiber
Color/Appearance	Aluminum laminate, brown reverse side
Weave Style	Twill rip stop
Fabric Weight oz./yd ² (g/m ²)	7.5 (255)
Fabric Thickness inches (mm)	0.015 (0.38)
Warp Breaking Strength Lbs./inch	250 (114kg)
Fill Breaking Strength, lbs/in.	200 (91 kg)
Abrasion Resistance	Very Good
Warp Tear Strength, lbs. (Trapezoid)	32 (14.5 kg)
Filling Tear Strength, lbs. (Trapezoid)	26 (11.8 kg)
Flame Resistance, after flame, seconds	0
Char Length, Inches	0.7
Coating/Lamination	Mylar film aluminum laminate
Finish Number	AL1, Aluminum laminate; See Fabric Finish Options data sheet

All data +/- 10%
8/12



1310 Stanbridge Street,
Box 830, Norristown, PA 19404-0830 U.S.A.
Tel: 610-275-7270 • 800-441-9680 • Fax: 610-277-6106
Email: sales@norfab.com • www.norfab.com